



Bellhop Table

Designed by Edward Barber and Jay Osgerby, 2018




3W - 151lm - 2700K

Rechargeable direct light table lighting device. Base and dome in coloured PC. Diffuser in Opaline injection moulded photo-engraved PC. 24-hours' autonomy, charging via Micro-USB-C. Push-button switch positioned on the base provides the 4-step dimmer function. Battery status indicator positioned under the base. USB-C charging cable included, useful length 120cm.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

| EAN | 8059607001271 |
|------------------------|---------------------|
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 3 |
| System flux (lm) | 151 |

Physical

| Colour | White |
|---------------------|-------|
| Length (mm) | 125 |
| Net weight (kg) | 1.3 |
| Package height (mm) | 200 |
| Package width (mm) | 200 |
| Package length (mm) | 330 |
| Package volume (m3) | 0.01 |
| IP internal | 20 |

Download

| Nounting instructions | $\overline{\mathbf{A}}$ | PDF |
|-----------------------|-------------------------|-----|
| Nounting instructions | 业 | PDF |

Photometric Files

LDT / IES



Technical Drawings

| 2D | <u>¥</u> | ZIP |
|----|-------------------|-----|
| 3D | $\overline{\bot}$ | ZIP |




















https://professional.flos.com/en/global/product/bellhop-table-f1060009/

F1060009

Schematic light drawing



Photometric

| Light distribution | Roto symmetric |
|--------------------|----------------|
| CCT (K) | 2700 |
| Extreme cut off | No |

Electrical

| Insulation class | III |
|--------------------|-------------------|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240/5 |
| Power supply | Remote excluded |
| Dimmable | Yes |
| Power supply type | Electronic 5V |
| Dimming interface | Dimmer Integrated |
| Batteries inside | Yes |
| Battery type | LI-PO |
| Charging max power | 14 |
| Charging min time | 3H - 0% TO 100% |
| Charging | USB-C |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class C




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

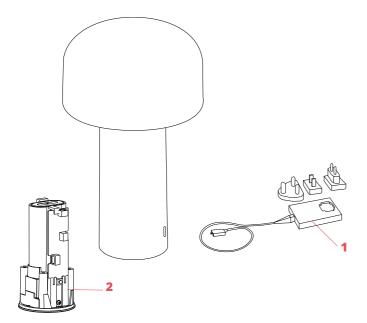

01. Power charger with electrical RF1035109

cable & plugs

02. Bellhop base assembly with RF2864

battery kit





RF1035109

Power charger with electrical cable & plugs

RF28641

Bellhop base assembly with battery kit