



NULLA

Davide Groppi / 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that. Nulla generates light and propagates mystery. Nulla is the most generous of our lamps. Its sole objective is to hide and give all the attention to whatever it is lighting. What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award 2014


Compasso d'Oro ADI
Award 2014




Recessed / Direct / Indoor


Material Metal
Finish .00 Standard


Note Recessed luminaire. Visible 0.71" / 0.98" diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.



NULLA - 23°
9W
24V DC
2700K - 265lm / 3000K - 273lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K
Standard - 3000K
1A4100003.27.20
1A4100003.30.20



NULLA - 32°
9W
24V DC
2700K - 298lm / 3000K - 307lm
CRI >90
Beam 32°
UGR <19
Driver not included



Standard - 2700K
Standard - 3000K
1A2110003.27.20
1A2110003.30.20



NULLA 18 - 20°
3W
24V DC
2700K - 162lm / 3000K - 173lm
CRI >90
Beam 20°
UGR <19
Driver not included



Standard - 2700K
Standard - 3000K
1A2010003.27.20
1A2010003.30.20



NULLA 25 - 23°
5W
24V DC
2700K - 228lm / 3000K - 245lm
CRI >90
Beam 23°
UGR <19
Driver not included



Standard - 2700K
Standard - 3000K
1A4080003.27.20
1A4080003.30.20



NULLA 25 - 32°
5W
24V DC
2700K - 288lm / 3000K - 310lm
CRI >90
Beam 32°
UGR <19
Driver not included


Standard - 2700K
Standard - 3000K
1A2020003.27.20
1A2020003.30.20




NULLA 25 T24
5,6W
Max 500mA DC
3000K - 357lm / 2700K - 357lm
CRI >90
Driver not included


Standard - 3000K
Standard - 2700K
1A1010003
1A1010003-27

Compulsory accessories


Installation kits




Plasterboard flange 0.49"				Not included
Matt Black	Cut-out Ø 0.83" Minimum space for mounting 3.94" IP65	NULLA	1A2200400.00.00	



Plasterboard flange 5/8"				Not included
Matt Black	Cut-out Ø 0.83" Minimum space for mounting 3.94" IP65	NULLA	1A5670400.00.00	



Plasterboard flange 0.49"				Not included
Matt Black	Cut-out Ø 0.87" Minimum space for mounting 7.48"	NULLA 18	1A2210400.00.00	



Masonry Box				Not included
Standard		NULLA 18	1A2390000.00.00	




Plasterboard flange 0.49"				Not included
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 7.48"	NULLA 25	1A2170400.00.00	



Plasterboard flange 0.49"				Not included
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 5.71" IP65	NULLA 25	1A3980400.00.00	



Plasterboard flange (bottom) ≠ 0.49"				Not included
Matt Black	Cut-out Ø 1.38" Minimum space for mounting 5.71" IP65	NULLA 25	1A4960400.00.00	



Masonry Box				Not included
Standard		NULLA 25	1A2380000.00.00	




Plasterboard flange 0.49"				Not included
	Cut-out Ø 1.38" Minimum space for mounting 6.30" IP65	NULLA 25 T24	18250000	


The sizes are expressed in inches.

Compulsory accessories


Drivers




Driver				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	NULLA / NULLA 18 / NULLA 25	1Z0241180.24	



Driver				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z0240870.24	




Driver				Not included
120-277V	24V/60W/IP20/TRIAC - 1-10V	NULLA / NULLA 18 / NULLA 25	1Z2020040	



Driver				Not included
120V	500mA/50W/IP20/1-10V	NULLA 25 T24	1Z2000010	

Optional accessories


Installation kits




Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 15.75" x 15.75"	NULLA	1A3790000.00.00	




Trapdoor for plasterboard 0.49"				Not included
Standard	Cut-out 7.87" x 7.87"	NULLA	1A3780000.00.00	

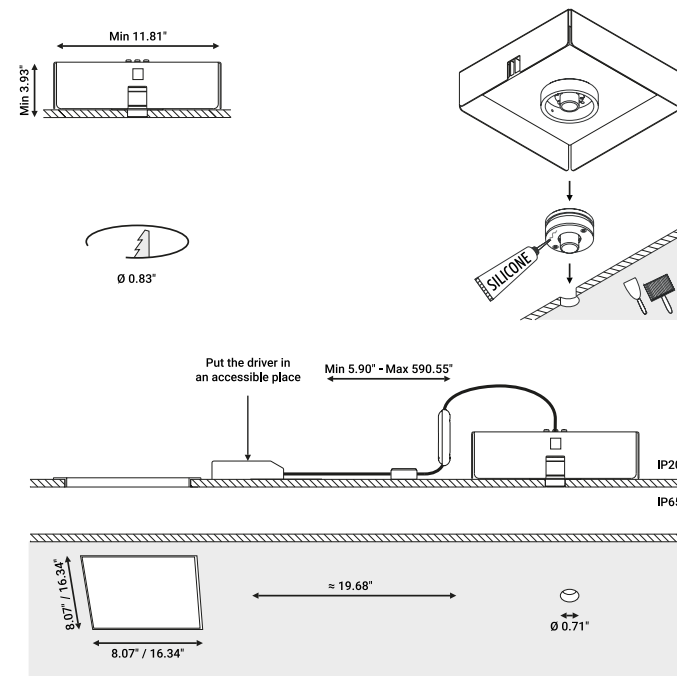

1A2200400.00.00 - 1A5670400.00.00 - NULLA installation conditions

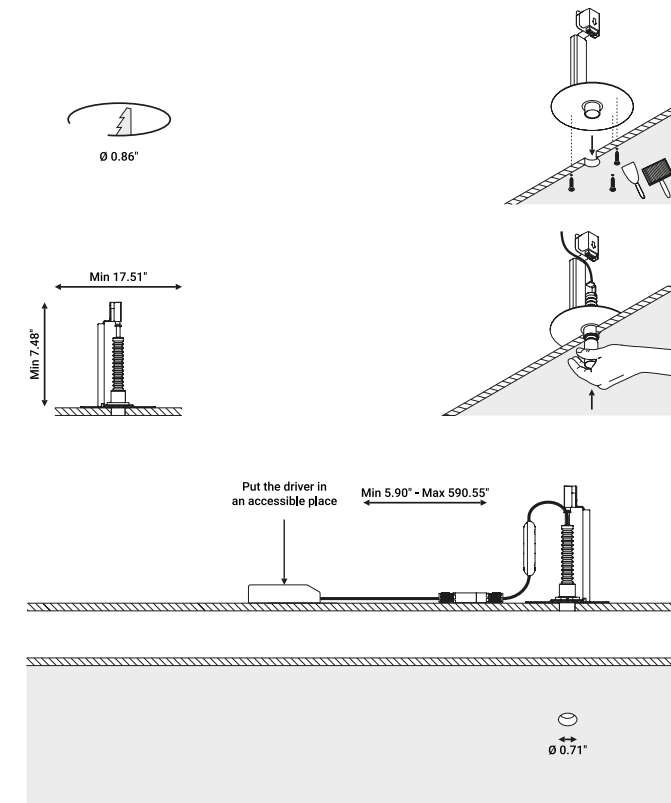


1A2210400.00.00 - NULLA 18 installation conditions

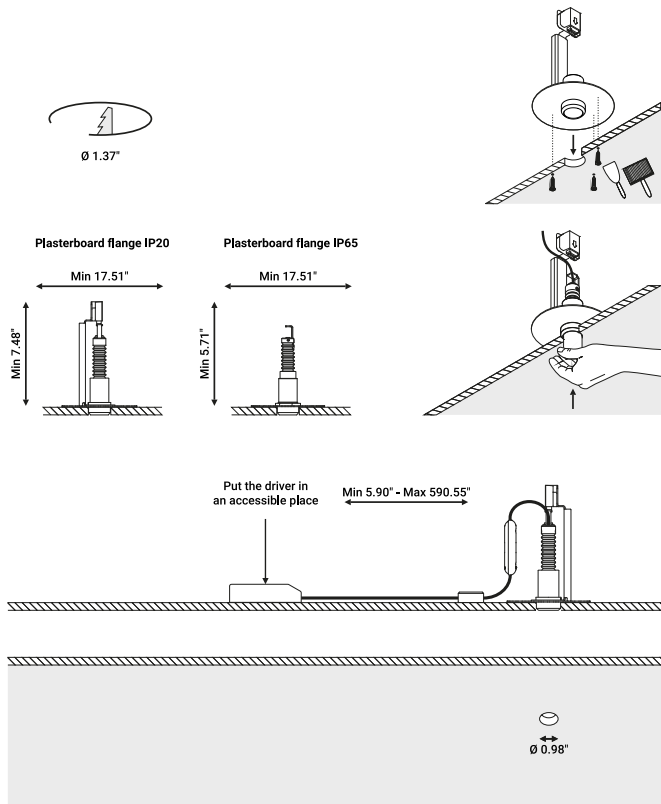


1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions

The sizes are expressed in inches.

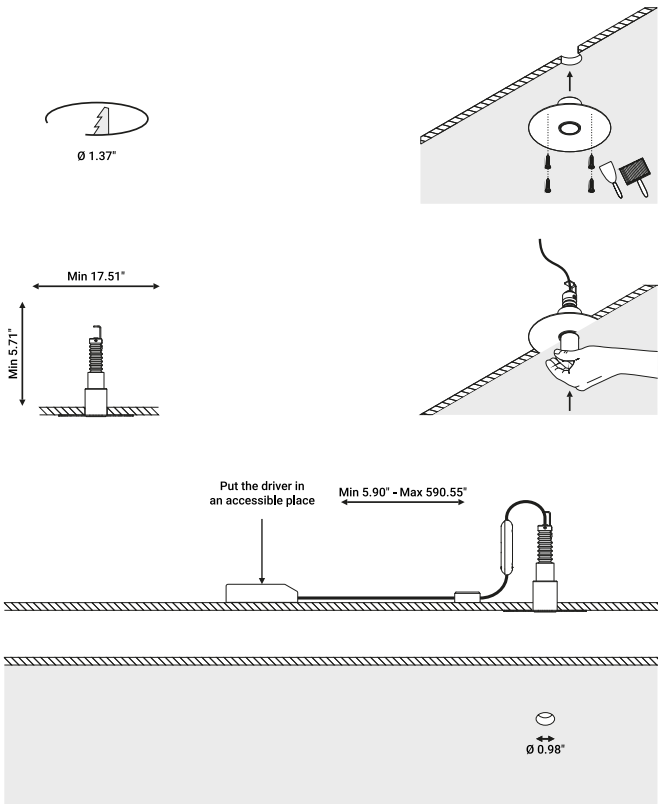

1A4960400.00.00 - NULLA 25 installation conditions

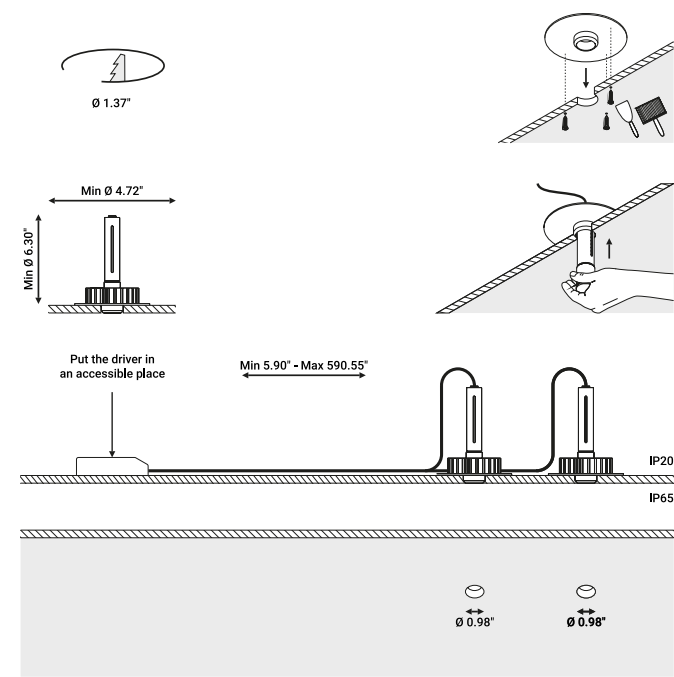

18250000 - NULLA 25 T24 installation conditions

The sizes are expressed in inches.

