

WIREFLOW

Design by Arik Levy.

Reference

0320.

Application

Pendants

Installation type

Surface mounted

Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with two 4,5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail spaces.

Diffuser

Optical diffuser: Polycarbonate

Materials


Body: Aluminum
Horizontal rods: Steel
Canopy: Steel

Finishes



0320-04 Black (RAL 9005)

Sketch




Electrical characteristics

2 x LED 4.5W 700mA



Total 9.0 W

VIBIA



Light source: 2700K CRI >80 980 lm 108 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual


Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

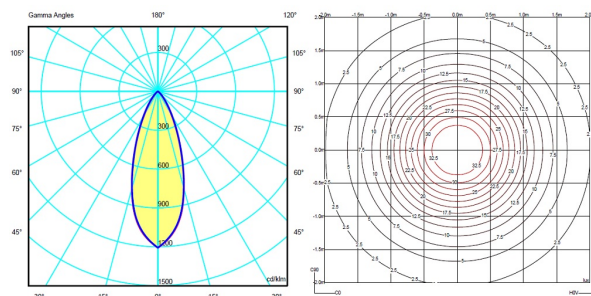

Certificates



illuminations

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com

WIREFLOW

Design by Arik Levy.

Reference

0325.

Application

Pendants

Installation type

Surface mounted

Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with six 4.5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail spaces.

Diffuser

Optical diffuser: Polycarbonate

Materials


Body: Aluminum
Horizontal rods: Steel
Canopy: Steel

Finishes



0325-04 Black (RAL 9005)

Sketch





Electrical characteristics

6 x LED 4.5W 700mA

Total 27.0 W



VIBIA

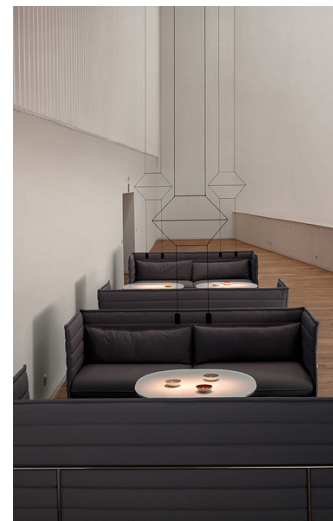

Light source: 2700K CRI >80 2941 lm 108 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual


Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

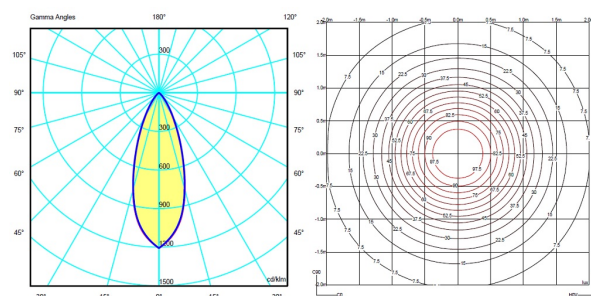

Certificates



illuminations

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com

WIREFLOW

Design by Arik Levy.

Reference

0330.

Application

Pendants

Installation type

Surface mounted

Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with ten 4,5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail spaces.

Diffuser

Optical diffuser: Polycarbonate

Materials


Body: Aluminum
Horizontal rods: Steel
Canopy: Steel

Finishes



0330-04 Black (RAL 9005)

Sketch



Electrical characteristics



10 x LED 4.5W 700mA

Total 45.0 W



A+

VIBIA

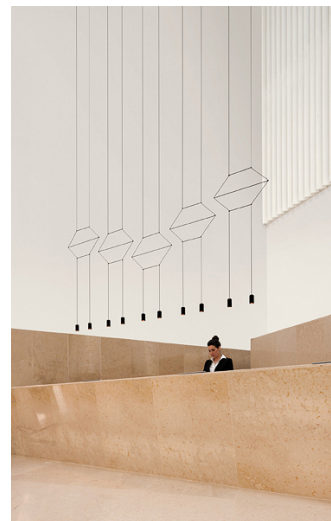

Light source: 2700K CRI >80 4902 lm 108 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual


Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

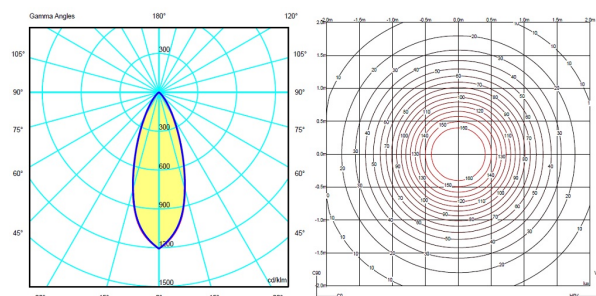

Certificates



illuminations
425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064
sales@illumco.com

WIREFLOW

Design by Arik Levy.

Reference

0332.

Application

Pendants

Installation type

Surface mounted

Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with ten 4,5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail spaces.

Diffuser

Optical diffuser: Polycarbonate

Materials


Body: Aluminum
Horizontal rods: Steel
Canopy: Steel

Finishes



0332-04 Black (RAL 9005)

Sketch



Electrical characteristics


10 x LED 4.5W 700mA

Total 45.0 W



A+

VIBIA



Light source: 2700K CRI >80 4902 lm 108 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Certificates



WIREFLOW

Design by Arik Levy.

Reference

0338.

Application

Pendants

Installation type

Surface mounted

Description

The Wireflow lineal pendant lights have two new patterns. Their appearance, as a structure of fine cables finished with six black lacquered aluminum LED terminals, is ideal for discretely providing accent illumination above a variety of areas and spaces for a look ranging from eclectic to futuristic.

Diffuser

Polycarbonate diffuser

Materials

Diffuser: Polycarbonate

Body: Aluminum

Horizontal rods: Steel


Canopy: Steel

Finishes



0338-04 Black (RAL 9005)

Sketch



Electrical characteristics

6 x LED 4.5W 700mA

Total 27.0 W



Light source: 2700K CRI >80 2941.56 lm 109 lm/W

Fixture: 1179.62 lm 43.68 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Efficiency : 40.10%

Coordinate system : CG

Total flux : 2941.60 lm

Maximum value : 55.38 cd/klm

Light position : C=50.00 G=50.00

Symmetry on the planes : Double symmetrical

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates



WIREFLOW

Design by Arik Levy.

Reference

0340.

Application

Pendants

Installation type

Surface mounted

Description

The Wireflow lineal pendant lights have two new patterns. Their appearance, as a structure of fine cables finished with eight black lacquered aluminum LED terminals, is ideal for discretely providing accent illumination above a variety of areas and spaces for a look ranging from eclectic to futuristic.

Diffuser

Polycarbonate diffuser

Materials

Diffuser: Polycarbonate

Body: Aluminum

Horizontal rods: Steel


Canopy: Steel

Finishes



0340-04 Black (RAL 9005)

Sketch



Electrical characteristics

8 x LED 4.5W 700mA

Total 36.0 W



Light source: 2700K CRI >80 3922.08 lm 109 lm/W

Fixture: 1573.14 lm 43.69 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 3922.20 lm

Maximum value : 55.39 cd/klm

Light position : C=50.00 G=50.00

Symmetry on the planes : Double symmetrical

Isolux : FLOOR

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates

