


FLAMINGO

Bernhard Osann

Manual interaction and flexibility are the cornerstones of Flamingo: the variable weight distribution and central centre of gravity allow the structure to balance itself independently, ensuring stability and freedom of movement without friction. The adjustable light source offers functional or decorative illumination.

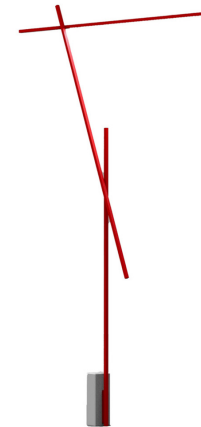

2700K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimmable on board
Tension	220/240V
Color temperature	2700K
Luminous flux	1800lm
Typ CRI	90
IP class	20
Dimensions	140x140x10cm
Materials	aluminium
Notes	red RAL3002, black RAL9005

Codes

FLM LNN 21
FLM LRR 21
FLM LLH 21

Structure

Black / Stone
Red / Stone
Chrome / Stone

Certificazioni



3000K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimnable on board
Tension	220/240V
Color temperature	3000K
Luminous flux	1800lm
Typ CRI	90
Dimensions	140x140x10cm
Materials	aluminium
Notes	red RAL3002, black RAL9005

Codes

FML LNN 22
FML LRR 22
FML LLH 22

Structure

Black / Stone
Red / Stone
Chrome / Stone

Certificazioni

