

Suspension, wall or ceiling lighting system with direct light for indoor use.

Track system with a range of available luminaires.

The matt white or matt black painted aluminium track is available in 1 m, 2 m and 3 m lengths. A range of connection and suspension accessories is available. The luminaires dedicated to this system have a matt white or matt black polycarbonate base. The projector is made of matt black or matt white painted aluminium. DOT, DOT 51, MIRA, and SPOT models are also available with a matt gold galvanized projector. All models are fully adjustable. A range of light control accessories is available.

The track runs on mains voltage (three-phase) and is modular. The system is compatible with a wide range of luminaires: D10, D11, D12, DOT, DOT 51, MIRA, and SPOT in their dedicated versions.

Sistema di illuminazione a sospensione o da soffitto o da parete, a luce diretta, per interni.

Un sistema a binario con vari corpi luminosi disponibili.

Il binario è in alluminio verniciato bianco opaco o nero opaco ed è disponibile nelle misure di 1 m, 2 m e 3 m. Sono disponibili diversi accessori di aggregazione e sospensione. Gli apparecchi dedicati a questo sistema hanno la base in policarbonato bianco opaco o nero opaco. Il proiettore è in alluminio verniciato nero opaco o bianco opaco. I modelli DOT, DOT 51, MIRA e SPOT sono disponibili anche con il proiettore galvanizzato oro opaco. Tutti i modelli sono orientabili in tutte le direzioni. Sono disponibili diversi accessori per il controllo della luce.

Il binario funziona a tensione di rete (trifase) ed è componibile. Il sistema è compatibile con i modelli: D10, D11, D12, DOT, DOT 51, MIRA e SPOT nelle versioni dedicate.

Finish


.03 Matt White

.39 Matt White/Polished Gold


.04 Matt Black

.49 Matt Black/Polished Gold

**BINARIO TRIFASE
Power right connector
and power left connector
installation**

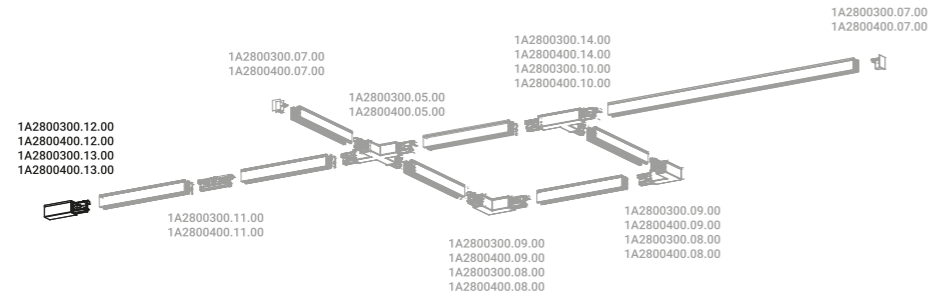


**BINARIO TRIFASE
Power intermediate
connector installation**

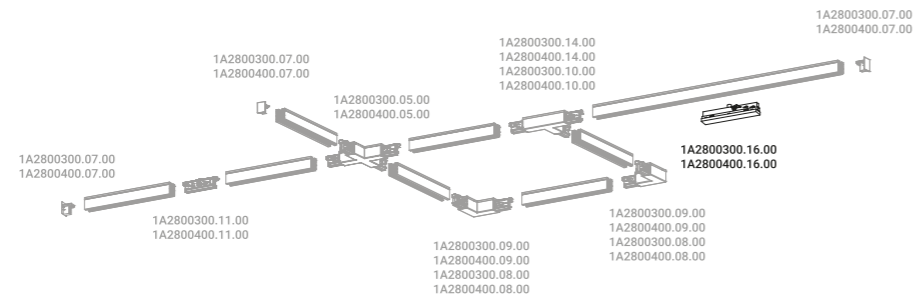

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Track 1 m / Binario 1 m	Not included
Matt White	1A2800300.01.00
Matt Black	1A2800400.01.00

Track 2 m / Binario 2 m	Not included
Matt White	1A2800300.02.00
Matt Black	1A2800400.02.00

Track 3 m / Binario 3 m	Not included
Matt White	1A2800300.03.00
Matt Black	1A2800400.03.00

End cap / Tappo di chiusura	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00



Connectors / Connettori



Power right connector / Elemento di alimentazione destro	Not included
Matt White	1A2800300.13.00
Matt Black	1A2800400.13.00



Power left connector / Elemento di alimentazione sinistro	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00



Power intermediate connector / Elemento di alimentazione intermedio	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Linear jointing connector / Connettore lineare passante	Not included
Matt White	1A2800300.11.00
Matt Black	1A2800400.11.00



Linear insulating connector / Connettore lineare isolante	Not included
Matt White	1A2800300.19.00
Matt Black	1A2800400.19.00



Internal L connector / Connettore L interno	Not included
Matt White	1A2800300.09.00
Matt Black	1A2800400.09.00



External L connector / Connettore L esterno	Not included
Matt White	1A2800300.08.00
Matt Black	1A2800400.08.00



Right T connector / Connettore T destro	Not included
Matt White	1A2800300.14.00
Matt Black	1A2800400.14.00



Left T connector / Connettore T sinistro	Not included
Matt White	1A2800300.10.00
Matt Black	1A2800400.10.00



X connector / Connettore X	Not included
Matt White	1A2800300.15.00
Matt Black	1A2800400.15.00




Adjustable suspension cable / Cavo di sospensione regolabile	Not included
Length 1500 mm	1A2800000.04.00
Length 3000 mm	1A2800000.05.00
Length 5000 mm	1A2800000.06.00



Cutting tool / Tronchese per taglio	Not included
	1A2800000.17.00



Compulsory accessories / Accessori obbligatori
Luminaires / Corpi illuminanti




D10 BINARIO

13W
220-240V - 50/60Hz
2700K - 266lm / 366lm
3000K - 316lm / 436lm
CRI >90
Beam 16° / 36°
UGR <19
Driver integrated
DALI



Matt White - 2700K - DALI	1A6250300.27.01
Matt White - 3000K - DALI	1A6250300.30.01
Matt Black - 2700K - DALI	1A6250400.27.01
Matt Black - 3000K - DALI	1A6250400.30.01




D11 BINARIO

21W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
Driver integrated
DALI



Matt White - 2700K - DALI	1A6270300.27.01
Matt White - 3000K - DALI	1A6270300.30.01
Matt Black - 2700K - DALI	1A6270400.27.01
Matt Black - 3000K - DALI	1A6270400.30.01




D12 BINARIO

29W
220-240V - 50/60Hz
2700K / 3000K
CRI >90
UGR <19
Driver integrated
DALI




Matt White - 2700K - DALI	1A6290300.27.01
Matt White - 3000K - DALI	1A6290300.30.01
Matt Black - 2700K - DALI	1A6290400.27.01
Matt Black - 3000K - DALI	1A6290400.30.01



DOT BINARIO

13W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI
CE, square, and IP20 certification icons.


Matt White - 2700K - DALI	1A2290300.27.01
Matt White - 3000K - DALI	1A2290300.30.01
Matt Black - 2700K - DALI	1A2290400.27.01
Matt Black - 3000K - DALI	1A2290400.30.01
Matt White/Polished Gold - 2700K - DALI	1A2293900.27.01
Matt White/Polished Gold - 3000K - DALI	1A2293900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2294900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2294900.30.01



DOT BINARIO 51

Max 10W
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE, square, and IP20 certification icons.


Matt White - ON/OFF	1A3710300.00.00
Matt Black - ON/OFF	1A3710400.00.00
Matt White/Polished Gold - ON/OFF	1A3713900.00.00
Matt Black/Polished Gold - ON/OFF	1A3714900.00.00



MIRA BINARIO

8W
220-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI
CE, square, and IP20 certification icons.

Matt White - 2700K - DALI	1A0490300.27.01
Matt White - 3000K - DALI	1A0490300.30.01
Matt Black - 2700K - DALI	1A0490400.27.01
Matt Black - 3000K - DALI	1A0490400.30.01
Matt White/Polished Gold - 2700K - DALI	1A0493900.27.01
Matt White/Polished Gold - 3000K - DALI	1A0493900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A0494900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A0494900.30.01



SPOT BINARIO

21W
220-240V - 50/60Hz
Driver integrated
DALI
LED Module not included
CE, square, and IP20 certification icons.

Matt White - DALI	1A0280300.00.01
Matt Black - DALI	1A0280400.00.01
Matt White/Polished Gold - DALI	1A0283900.00.01
Matt Black/Polished Gold - DALI	1A0284900.00.01

BINARIO TRIFASE

/ 2007

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori



Lens / Lente	Not included		
Beam - 15°	2700K - CRI >90 - 1607lm 3000K - CRI >90 - 1681lm	D11 BINARIO	1X0170000.02.00
Beam - 24°	2700K - CRI >90 - 1624lm 3000K - CRI >90 - 1699lm	D11 BINARIO	1X0170000.03.00
Beam - 38°	2700K - CRI >90 - 1683lm 3000K - CRI >90 - 1761lm	D11 BINARIO	1X0170000.04.00
Beam - 50°	2700K - CRI >90 - 1544lm 3000K - CRI >90 - 1615lm	D11 BINARIO	1X0170000.05.00



Lens / Lente	Not included		
Beam - 15°	2700K - CRI >90 - 1978lm 3000K - CRI >90 - 2102lm	D12 BINARIO	1X0160000.02.00
Beam - 24°	2700K - CRI >90 - 2602lm 3000K - CRI >90 - 2721lm	D12 BINARIO	1X0160000.03.00
Beam - 38°	2700K - CRI >90 - 2662lm 3000K - CRI >90 - 2783lm	D12 BINARIO	1X0160000.04.00
Beam - 50°	2700K - CRI >90 - 2441lm 3000K - CRI >90 - 2552lm	D12 BINARIO	1X0160000.05.00




Lens / Lente	Not included		
Beam - 14°	2700K - CRI >97 - 983lm 3000K - CRI >97 - 1038lm	DOT BINARIO	1A3090000.00.00
Beam - 24°	2700K - CRI >97 - 943lm 3000K - CRI >97 - 996lm	DOT BINARIO	1A3100000.00.00
Beam - 36°	2700K - CRI >97 - 955lm 3000K - CRI >97 - 1005lm	DOT BINARIO	1A3110000.00.00
Beam - 50°	2700K - CRI >97 - 965lm 3000K - CRI >97 - 1016lm	DOT BINARIO	1A3120000.00.00

BINARIO TRIFASE


/ 2007

Compulsory accessories / Accessori obbligatori


LED modules / Moduli LED



DG111 LED module / Modulo LED DG111	Not included	
16,7W - 15° - 500mA DC 2700K - 1349lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A4700000.27.20
16,7W - 15° - 500mA DC 3000K - 1434lm - CRI >90 Energy Efficiency F - Dimmable		1A4700000.30.20



DG111 LED module / Modulo LED DG111	Not included	
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3890000.27.20
16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable		1A3890000.30.20



DG111 LED module / Modulo LED DG111	Not included	
16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	SPOT BINARIO	1A3900000.27.20
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable		1A3900000.30.20

BINARIO TRIFASE

BINARIO TRIFASE



BINARIO TRIFASE

/ 2007

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Honeycomb louvre / Frangiluce nido d'ape			Not included
Matt White	D11 BINARIO	1X0170300.01.00	
Matt Black	D11 BINARIO	1X0170400.01.00	



Honeycomb louvre / Frangiluce nido d'ape			Not included
Matt White	D12 BINARIO	1X0160300.01.00	
Matt Black	D12 BINARIO	1X0160400.01.00	



Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape			Not included
	DOT BINARIO	1X0080400.01.00	



Elliptical filter / Filtro ellittico			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00



Blue filter / Filtro blu			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter / Filtro rosso			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00



Yellow filter / Filtro giallo			Not included
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

BINARIO TRIFASE

/ 2007

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500



LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210



LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010

Other accessories / Altri accessori



Darklight			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040



25° beam filter / Filtro fascio 25°			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020



36° beam filter / Filtro fascio 36°			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030

Optional accessories / Accessori opzionali

Other accessories / Altri accessori

	Soft filter / Filtro soft Standard		SPOT BINARIO	1X0190000.03.00	Not included
	Louvre 1 / Frangiluce 1 Matt Black		SPOT BINARIO	1X0190400.10.00	Not included
	Louvre 2 / Frangiluce 2 Matt Black		SPOT BINARIO	1X0190400.11.00	Not included
	Parabola Matt Black		SPOT BINARIO	1X0190400.08.00	Not included
	Snoot Matt Black		SPOT BINARIO	1X0190400.09.00	Not included
	Louvre 3 / Frangiluce 3 Matt Black	For Parabola - Snoot	SPOT BINARIO	1X0190400.12.00	Not included
	Louvre 4 / Frangiluce 4 Matt Black	For Parabola - Snoot	SPOT BINARIO	1X0190400.13.00	Not included

