



Floor / suspension luminaire with diffuse light for indoor use.

The magic of the shade.  
A light that waits for us, making us feel at home, taking us back to a time when everything seemed easier.  
The lamp is switched on without intruding, like a light breathe in the space.  
The light is born inside, but never shows itself directly.  
It crosses three paper shields, becoming soft.  
Shadows dissolve, outlines become smooth, everything seems to slow down.  
In UMASI, the shade runs on the wire, from the ceiling to the floor.

In UMASI, the rose and base are in sanded matt black anodised aluminium.  
In UMASI S, the roses available are in textured matt black or matt white painted steel.  
The shade is in PETG, coated inside and outside with paper.

The light source is LED with integrated module.  
In UMASI, the vertical electric cable is coaxial and matt black.  
The electric floor cable is matt black.  
The switch / dimmer is fitted on the cable.  
The power supply is plug-in and is included.  
In UMASI S, the electric cable is in matt white or matt black, depending on the luminaire finish.  
A range of roses and power supplies are available.

Apparecchio di illuminazione da terra / sospensione, a luce diffusa, per interni.

La magia del paralume.  
Una luce ci aspetta, ci fa sentire a casa, ci riporta a un tempo in cui tutto sembrava più semplice.  
La lampada si accende senza imporsi, come un respiro leggero nello spazio.  
La luce nasce al suo interno, ma non si mostra mai direttamente.  
Attraversa tre schermi di carta e diventa morbida.  
Le ombre si dissolvono, i contorni si fanno gentili, tutto sembra rallentare.  
In UMASI, il paralume scorre sul filo, dal soffitto al pavimento.

In UMASI, il rosone e la base sono in alluminio anodizzato nero opaco sabbato.  
In UMASI S, i rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato.  
Il paralume è in PETG rivestito, internamente ed esternamente, in carta.

La sorgente luminosa è a LED e a modulo integrato.  
In UMASI, il cavo elettrico verticale è coassiale e di colore nero opaco.  
Il cavo elettrico a terra è di colore nero opaco.  
L'interruttore / dimmer è lungo il cavo.  
L'alimentatore è a spina ed è incluso.  
In UMASI S, il cavo elettrico è di colore bianco opaco o nero opaco in funzione della finitura.  
Sono disponibili vari rosoni e sistemi di alimentazione.


---

**Finish** .00 Standard

---


**Certification** Luminaire US/CAN certification pending. CHINA certification pending.  
Apparecchio illuminante con certificazione US/CAN in corso. Certificazione CHINA in corso.

---

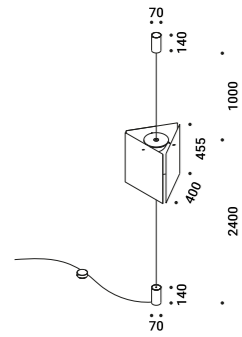

**UMASI 40**  
 26W  
 100-240V - 50/60Hz  
 2700K - 2105lm / 3000K - 2138lm  
 CRI >90  
 Driver with plug included  
 Dimmer on board  
 CE IP20

Standard - 2700K - Dimmer on board	1A6560000.27.06
Standard - 3000K - Dimmer on board	1A6560000.30.06

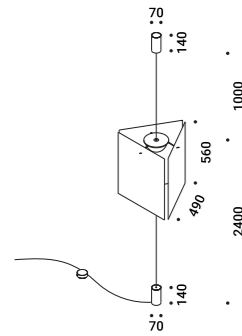

**UMASI 50**  
 26W  
 100-240V - 50/60Hz  
 2700K - 2204lm / 3000K - 2237lm  
 CRI >90  
 Driver with plug included  
 Dimmer on board  
 CE IP20


Standard - 2700K - Dimmer on board	1A6910000.27.06
Standard - 3000K - Dimmer on board	1A6910000.30.06

**Optional accessories / Accessori opzionali**


Other accessories / Altri accessori




<b>Black sheet / Foglio nero</b>			Not included
Matt Black	1 Piece	UMASI 40 / UMASI S 40	1X0300400.03.00




<b>Black sheet / Foglio nero</b>			Not included
Matt Black	1 Piece	UMASI 50 / UMASI S 50	1X0300400.04.00

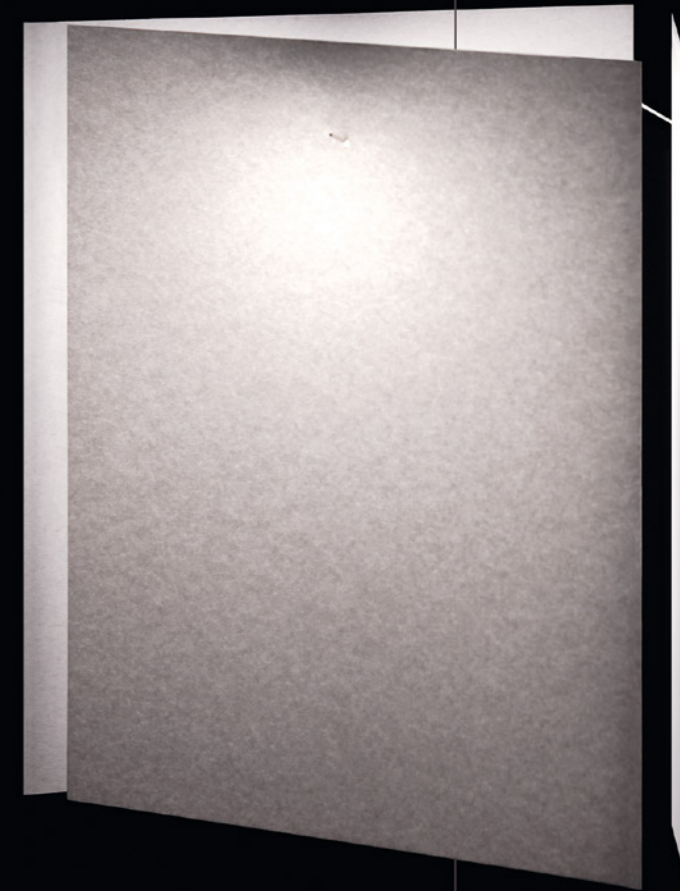

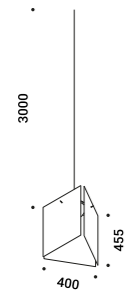

**UMASI S 40**  
 24W  
 Max 700mA DC  
 2700K - 2105lm / 3000K - 2138lm  
 CRI >90  
 Driver not included  
 CE IP20

Standard - 2700K	1A6940000.27.20
Standard - 3000K	1A6940000.30.20

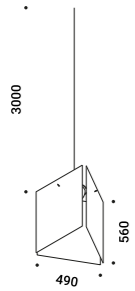


**UMASI S 50**  
 24W  
 Max 700mA DC  
 2700K - 2105lm / 3000K - 2138lm  
 CRI >90  
 Driver not included  
 CE IP20


Standard - 2700K	1A6950000.27.20
Standard - 3000K	1A6950000.30.20

**Compulsory accessories / Accessori obbligatori**

Suspension kits / Kit di sospensione



Ceiling rose with driver / Rosone con alimentatore		Not included
Matt White	Input 110-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0300300.01.07
Matt Black	Input 110-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - DALI - PUSH - 1-10V	1X0300400.01.07
Matt White	Input 220-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - TRIAC/IGBT	1X0300300.01.02
Matt Black	Input 220-240V - 50/60Hz Output 700mA DC - Max 24W IP20 - TRIAC/IGBT	1X0300400.01.02




Ceiling rose without driver / Rosone senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.06.00
Matt Black	For electrical cables - 1 Piece	1X0010400.06.00

**Compulsory accessories / Accessori obbligatori**

Suspension kits / Kit di sospensione




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.06.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000400.06.00




Recessed rose without driver / Rosone da incasso senza alimentatore		Not included
Matt White	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0230300.04.00
Matt Black	Plasterboard cut-out 85x97 mm Minimum space for mounting 120 mm For 12,5 mm plasterboard	1X0230400.04.00

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V(110-127V)	700mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.700




Driver / Alimentatore		Not included
220-240V	700mA/28W/IP20/TRIAC/IGBT	1Z0241580.700

**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore		Not included
		1A0360000.00.00



Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included
Matt White	Transparent cable 3 m included	1A0770300.00.00
Matt Black	Transparent cable 3 m included	1A0770400.00.00