

# °cd

°cd is a spot, especially developed for cast concrete ceilings.


This collection of spotlights is almost invisibly integrated into the ceiling and can also be combined with a ventilation nozzle.

It offers a solution for the proliferation of surface-mounted devices for ceiling techniques; usually in various sizes and shapes, not compatible with each other.


The spots can easily be mounted in drilled or poured holes in the ceiling. An extra advantage is that the character of a concrete ceiling is additionally exposed.





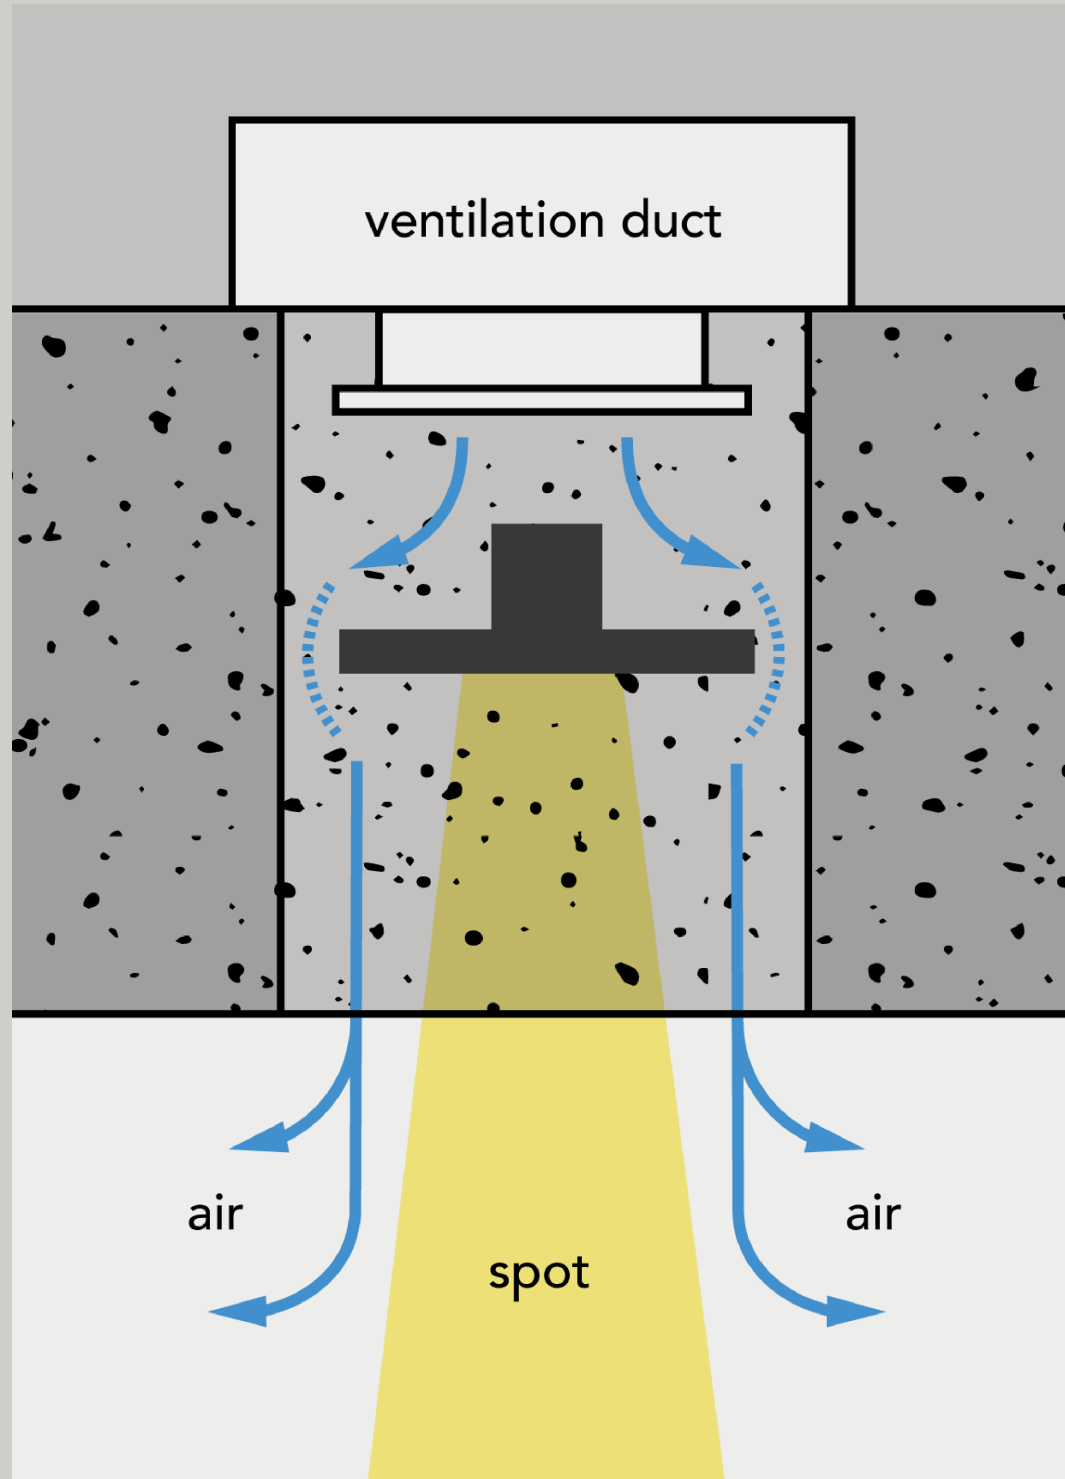

Scheme ventilation

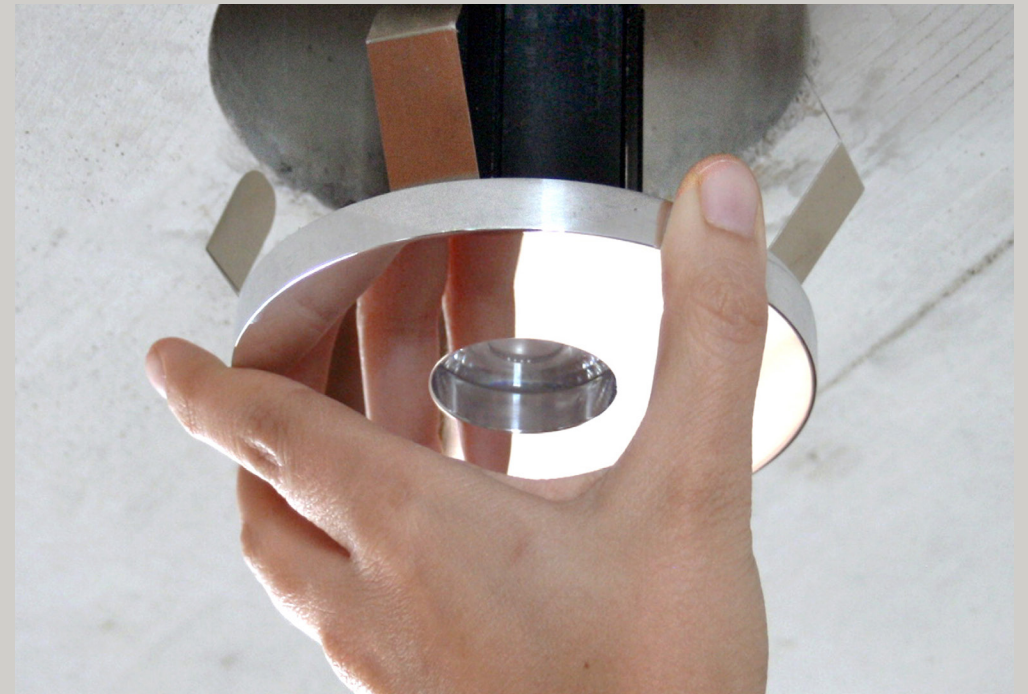

Easy installation





Smaller disc (105 mm) to use with ventilation system / mold has diameter of 135 mm

# °cd

material aluminum, oak  
 weight 0,8 - 1,6 kg / 0,52 - 1,04 lb  
 voltage 240 Vac  
 cri >90  
 wattage 9W  
 lumen 700 lm  
 dimming phase cut dimmable (dimming range 0,1 to 100 %) or dali

IP20   

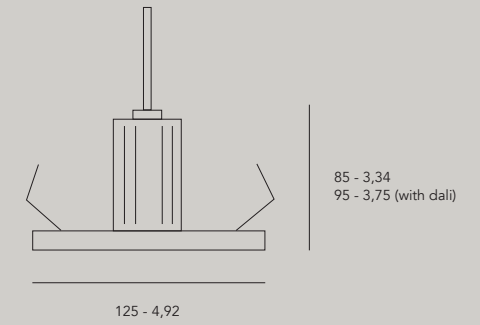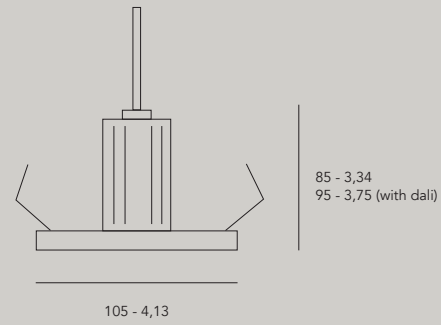

**Order Code**

**04200.AA00.BBBB.CCC.DD** diameter 105 mm  
 (to use with ventilation system)

<b>AA</b>	<b>Finish</b>
01	black
02	white
22	aluminum brushed
34	aluminum polished
21	black alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
41	oak natural
42	oak classic brown
43	oak black

<b>BBBB</b>	<b>Light</b>
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

<b>CCC</b>	<b>Optic</b>	<b>Output*</b>
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

<b>DD</b>	<b>Dimming</b>
PH	phase cut
DA	dali

**Order Code**

**04201.AA00.BBBB.CCC.DD** diameter 125 mm  
 (without ventilation system)

<b>AA</b>	<b>Finish</b>
01	black
02	white
22	aluminum brushed
34	aluminum polished
21	black alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
41	oak natural
42	oak classic brown
43	oak black

<b>BBBB</b>	<b>Light</b>
9027	cri >90, 2700K
9030	cri >90, 3000K
9040	cri >90, 4000K on request

<b>CCC</b>	<b>Optic</b>	<b>Output*</b>
380	38°	670lm - 1550cd
600	60°	700lm - 1070cd

<b>DD</b>	<b>Dimming</b>
PH	phase cut
DA	dali

**Accessories**

- 04210.0000 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 340mm incl.
- 04210.0001 waxed PU mold PU for casting concrete, diam 135 mm, mounting screw 160mm incl.

- 04213 universal control valve for 125 system



04213



04210