

FLOS

■ F6380030 Black

Snoopy

Designed by Achille and Pier Giacomo Castiglioni, 1967



Halogen - 100W

Table lamp giving direct light with enamelled metal reflector and white Carrara's marble base. It was designed by Achille e Pier Giacomo Castiglioni in 1967.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | Bulb |
| Light sources included | No |
| Lamp category | Halogen |
| Lamp holders | E27 |
| Ilcos | HSGS |
| Number of lamps | 1 |
| Power (W) | 100 |

Physical

| | |
|---------------------|-------|
| Colour | Black |
| Length (mm) | 394 |
| Cord colour | Black |
| Net weight (kg) | 7.99 |
| Package volume (m3) | 0.1 |
| IP internal | 20 |

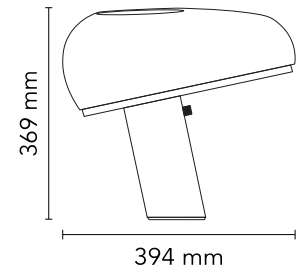

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Luminous flux Luminaire
1800 lm


Photometric

| | |
|--------------------|------------------|
| Lighting type | Indirect, Direct |
| Light distribution | Asymmetric |
| Extreme cut off | No |

Electrical

| | |
|--------------------|-------------------|
| Insulation class | II |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Dimmable | Yes |
| Dimming interface | Dimmer Integrated |
| Plug type | Type C |
| Batteries inside | No |

Bulbs



NOT INCLUDED

RF25317

LED Opal Lamp E27 8W 3000K
A60 Dimmable




NOT INCLUDED

RF25323

LED Opal Lamp E27 8W 2700K
A60 Dimmable

Spare Parts

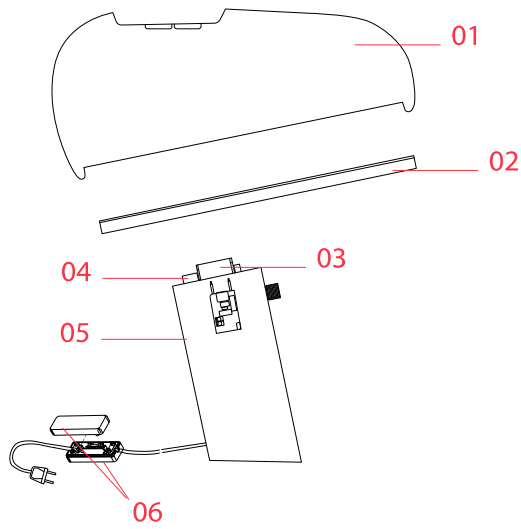

| | | |
|-----|-----------------------------------|---------|
| 01. | Black reflector | RF80966 |
| 02. | Snoopy glass diffuser | RF84656 |
| 03. | E27 lamp holder | RF11912 |
| 04. | Ring nut | RF11919 |
| 06. | Electrical assembly with fuse box | RF12478 |



RF80966
Black reflector



RF84656
Snoopy glass diffuser



RF11912
E27 lamp holder



RF11919
Ring nut



RF12478
Electrical assembly with fuse box