

Suspension luminaire with direct light for indoor use.

The surprise of an extremely thin yet very bright lamp.

The roses available are in textured matt black or matt white painted steel.  
The body is in matt or brushed black, bronze or natural anodised aluminium.  
SOTTILE SISTEMA DE is dual emission.


The light source is LED with integrated module.  
The modules can be combined using the special electro-mechanical joint.  
The electric cable is coaxial and matt black.  
A range of roses and power supplies are available.

Apparecchio di illuminazione a sospensione, a luce diretta, per interni.

La sorpresa di una lampada estremamente sottile, ma al contempo molto luminosa.

I rosoni disponibili sono in acciaio verniciati bianco opaco o nero opaco texturizzato.  
Il corpo è in alluminio anodizzato nero, bronzo o naturale opaco e spazzolato.  
SOTTILE SISTEMA DE è a doppia emissione.

La sorgente luminosa è a LED e a modulo integrato.  
I moduli sono aggregabili con l'apposito giunto elettromeccanico.  
Il cavo elettrico è coassiale e di colore nero opaco.  
Sono disponibili vari rosoni e sistemi di alimentazione.

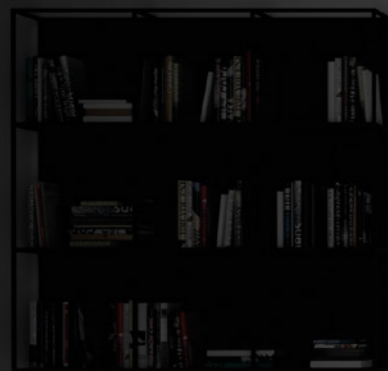


**Finish**

**.29** Brushed Bronze  
**.44** Natural Aluminium

**.36** Brushed Black

# SOTTILE SISTEMA


Davide Groppi / 2025



## SOTTILE SISTEMA - 800

12W  
24V DC  
2700K - 496lm / 3000K - 522lm  
CRI >90  
Driver not included  
CE IP20 E


Brushed Bronze - 2700K	1A6372900.27.20
Brushed Bronze - 3000K	1A6372900.30.20
Brushed Black - 2700K	1A6373600.27.20
Brushed Black - 3000K	1A6373600.30.20
Natural Aluminium - 2700K	1A6374400.27.20
Natural Aluminium - 3000K	1A6374400.30.20



## SOTTILE SISTEMA - 1100

16W  
24V DC  
2700K - 667lm / 3000K - 702lm  
CRI >90  
Driver not included  
CE IP20 E

Brushed Bronze - 2700K	1A6392900.27.20
Brushed Bronze - 3000K	1A6392900.30.20
Brushed Black - 2700K	1A6393600.27.20
Brushed Black - 3000K	1A6393600.30.20
Natural Aluminium - 2700K	1A6394400.27.20
Natural Aluminium - 3000K	1A6394400.30.20




## SOTTILE SISTEMA - 1400

21W  
24V DC  
2700K - 852lm / 3000K - 897lm  
CRI >90  
Driver not included  
CE IP20 E

Brushed Bronze - 2700K	1A6352900.27.20
Brushed Bronze - 3000K	1A6352900.30.20
Brushed Black - 2700K	1A6353600.27.20
Brushed Black - 3000K	1A6353600.30.20
Natural Aluminium - 2700K	1A6354400.27.20
Natural Aluminium - 3000K	1A6354400.30.20

Davide Groppi / 2025


# SOTTILE SISTEMA



## SOTTILE SISTEMA DE - 800

24W  
24V DC  
2700K - Up 496lm - Down 496lm /  
3000K - Up 522lm - Down 522lm  
CRI >90  
Driver not included  
CE IP20 E


Brushed Bronze - 2700K	1A6382900.27.20
Brushed Bronze - 3000K	1A6382900.30.20
Brushed Black - 2700K	1A6383600.27.20
Brushed Black - 3000K	1A6383600.30.20
Natural Aluminium - 2700K	1A6384400.27.20
Natural Aluminium - 3000K	1A6384400.30.20



## SOTTILE SISTEMA DE - 1100

32W  
24V DC  
2700K - Up 667lm - Down 667lm /  
3000K - Up 702lm - Down 702lm  
CRI >90  
Driver not included  
CE IP20 E

Brushed Bronze - 2700K	1A6402900.27.20
Brushed Bronze - 3000K	1A6402900.30.20
Brushed Black - 2700K	1A6403600.27.20
Brushed Black - 3000K	1A6403600.30.20
Natural Aluminium - 2700K	1A6404400.27.20
Natural Aluminium - 3000K	1A6404400.30.20




## SOTTILE SISTEMA DE - 1400

42W  
24V DC  
2700K - Up 852lm - Down 852lm /  
3000K - Up 897lm - Down 897lm  
CRI >90  
Driver not included  
CE IP20 E


Brushed Bronze - 2700K	1A6362900.27.20
Brushed Bronze - 3000K	1A6362900.30.20
Brushed Black - 2700K	1A6363600.27.20
Brushed Black - 3000K	1A6363600.30.20
Natural Aluminium - 2700K	1A6364400.27.20
Natural Aluminium - 3000K	1A6364400.30.20

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>End cap with suspension cable / Tappo di chiusura con cavo di sospensione</b>		Not included
Matt Black		1X0200400.13.00



<b>End cap with electrical cable / Tappo di chiusura con alimentazione</b>		Not included
Matt Black	White electrical cable 5 m included	1X0200400.14.00
	Black electrical cable 5 m included	1X0200400.15.00

Suspension kits / Kit di sospensione




<b>Ceiling rose without driver / Rosone senza alimentatore</b>		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




<b>Recessed rose without driver / Rosone da incasso senza alimentatore</b>		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.04.00
	Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard


Drivers / Alimentatori



<b>Driver / Alimentatore</b>		Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490




<b>Driver / Alimentatore</b>		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500




<b>Controller</b>		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione




<b>Fixed joint with suspension cable / Giunto fisso con cavo di sospensione</b>		Not included
Matt Black		1X0200400.10.00




<b>Fixed joint with electrical cable / Giunto fisso con alimentazione</b>		Not included
Matt Black	White electrical cable 5 m included	1X0200400.08.00
	Black electrical cable 5 m included	1X0200400.09.00




<b>Flexible joint with suspension cable / Giunto orientabile con cavo di sospensione</b>		Not included
Matt Black		1X0200400.07.00



<b>Flexible joint with electrical cable / Giunto orientabile con alimentazione</b>		Not included
Matt Black	White electrical cable 5 m included	1X0200400.05.00
	Black electrical cable 5 m included	1X0200400.06.00



<b>Fixed isolated joint with suspension cable / Giunto fisso isolato con cavo di sospensione</b>		Not included
Matt Black		1X0200400.12.00



<b>Flexible isolated joint with suspension cable / Giunto orientabile isolato con cavo di sospensione</b>		Not included
Matt Black		1X0200400.11.00

Suspension kits / Kit di sospensione



<b>Ceiling rose without driver / Rosone senza alimentatore</b>		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00




<b>Recessed rose without driver / Rosone da incasso senza alimentatore</b>		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard	1X0000300.01.00
	Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm For 12,5 mm plasterboard

**MONO-EMISSION VERSION**


Modules can be connected together up to a **Max 84W**

**Max 6 modules per driver**

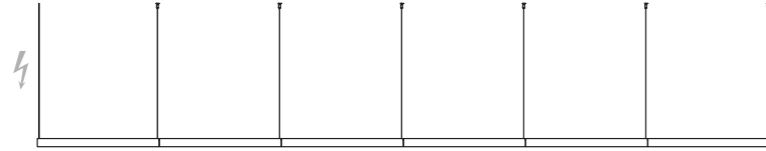


SOTTILE SISTEMA - 800 | Single module power: 12W

**Max 5 modules per driver**



SOTTILE SISTEMA - 1100 | Single module power: 16W

**Max 4 modules per driver**

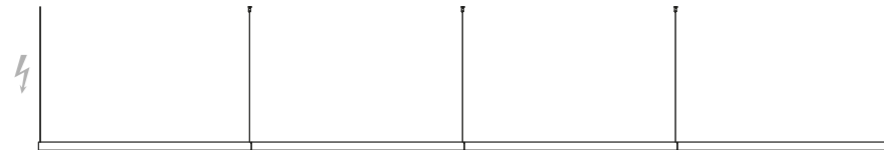


SOTTILE SISTEMA - 1400 | Single module power: 21W

**DUAL-EMISSION VERSION**


Modules can be connected together up to a **Max 84W**

**Max 3 modules per driver**

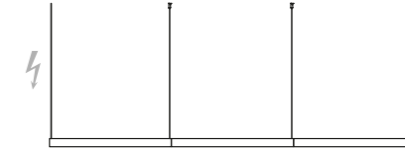


SOTTILE SISTEMA DE - 800 | Single module power: 24W

**Max 2 modules per driver**

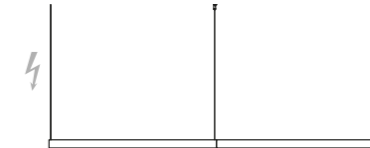

SOTTILE SISTEMA DE - 1100 | Single module power: 32W


**Max 2 modules per driver**

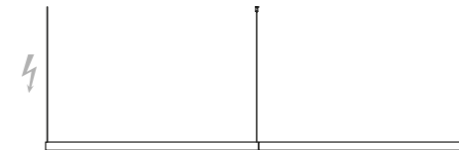

SOTTILE SISTEMA DE - 1400 | Single module power: 42W


Examples of installation with 1 driver and dedicated joints

■ DRIVER




- A / FLEXIBLE JOINT WITH ELECTRICAL CABLE  
1X0200400.05.00  
1X0200400.06.00
- B - C / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00
- D / FLEXIBLE ISOLATED JOINT WITH SUSPENSION CABLE  
1X0200400.11.00

■ DRIVER

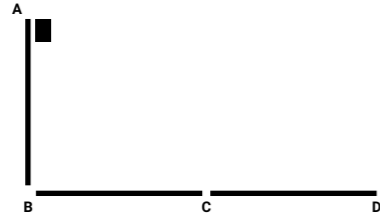

- A / END CAP WITH ELECTRICAL CABLE  
1X0200400.14.00  
1X0200400.15.00
- B / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00
- C / FIXED JOINT WITH SUSPENSION CABLE  
1X0200400.10.00
- D / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00


■ DRIVER

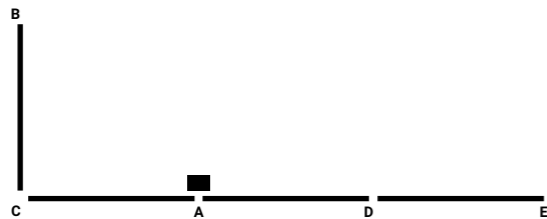

- A / FIXED JOINT WITH ELECTRICAL CABLE  
1X0200400.08.00  
1X0200400.09.00
- B / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00
- C / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00
- D / FIXED JOINT WITH SUSPENSION CABLE  
1X0200400.10.00
- E / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00

Examples of installation with 2 drivers and dedicated joints

■ 2x DRIVER

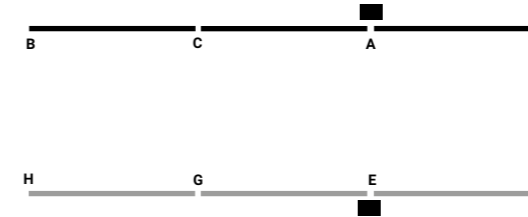


- A - E / FIXED JOINT WITH ELECTRICAL CABLE  
1X0200400.08.00  
1X0200400.09.00
- B - H / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00
- C - G / FIXED JOINT WITH SUSPENSION CABLE  
1X0200400.10.00
- D / FLEXIBLE ISOLATED JOINT WITH SUSPENSION CABLE  
1X0200400.11.00
- F / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00

■ 2x DRIVER



- A - B / FLEXIBLE JOINT WITH ELECTRICAL CABLE  
1X0200400.05.00  
1X0200400.06.00
- C - F / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00
- D / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00
- E / FLEXIBLE ISOLATED JOINT WITH SUSPENSION CABLE  
1X0200400.11.00

■ 2x DRIVER

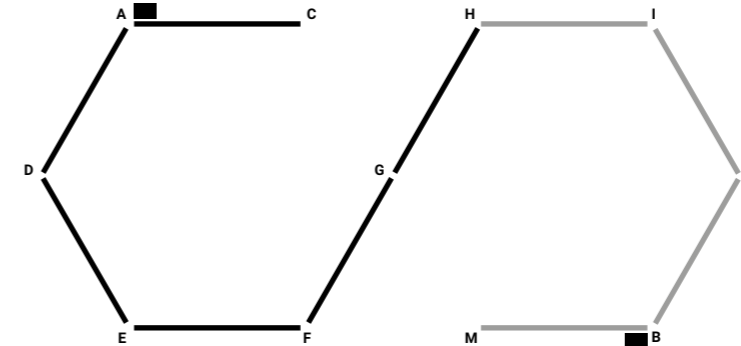


- A - B / FLEXIBLE JOINT WITH ELECTRICAL CABLE  
1X0200400.05.00  
1X0200400.06.00
- C - M / END CAP WITH SUSPENSION CABLE  
1X0200400.13.00
- D - E - F - I - L / FLEXIBLE JOINT WITH SUSPENSION CABLE  
1X0200400.07.00
- G / FIXED JOINT WITH SUSPENSION CABLE  
1X0200400.10.00
- H / FLEXIBLE ISOLATED JOINT WITH SUSPENSION CABLE  
1X0200400.11.00


# SUSPENSION GUIDELINE / GUIDA PER LE SOSPENSIONI

SUSPENSION LUMINAIRE  
code 1AXXXXXXXXXX20

CEILING



OR




CEILING ROSE  
WITH DRIVER

OR





CEILING ROSE  
WITHOUT DRIVER

+




REMOTE  
DRIVER




RECESSED



OR



OR




RECESSED ROSE  
WITHOUT DRIVER

+




REMOTE  
DRIVER



## SUSPENSION KITS / KIT DI SOSPENSIONE

### CEILING SUSPENSION KITS

Version	Use	Product reference	Finish	Code
Ceiling rose with driver*				
		See product page.		
Ceiling rose without driver				
Ceiling rose without driver 01	For suspension cables	SOTTILE SOTTILE SISTEMA	Matt White	1X0010300.01.00
			Matt Black	1X0010400.01.00
Ceiling rose without driver 02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
			Matt Black	1X0010400.02.00
Ceiling rose without driver 03	For suspension cables	MASAI REFLEX S	Matt White	1X0010300.03.00
			Matt Black	1X0010400.03.00
Ceiling rose without driver 04	For electrical cables	ASINTOTO REFLEX S SOTTILE SOTTILE SISTEMA taO	Matt White	1X0010300.04.00
			Matt Black	1X0010400.04.00
Ceiling rose without driver 05	For electrical cables	CARTESIO LOUIS XIV SOTTOSOPRA	Matt White	1X0010300.05.00
			Matt Black	1X0010400.05.00
Ceiling rose without driver 06	For electrical cables	CATHODE MISS OVO OVONELPIATTO	Matt White	1X0010300.06.00
			Matt Black	1X0010400.06.00



## SUSPENSION KITS / KIT DI SOSPENSIONE

### RECESSED SUSPENSION KITS

Version	Use	Product reference	Finish	Code
Recessed rose without driver				
Recessed rose without driver 01	For suspension cables	SOTTILE SOTTILE SISTEMA	Matt White	1X0000300.01.00
			Matt Black	1X0000400.01.00
Recessed rose without driver 02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
			Matt Black	1X0000400.02.00
Recessed rose without driver 03	For suspension cables	MASAI REFLEX S	Matt White	1X0000300.03.00
			Matt Black	1X0000400.03.00
Recessed rose without driver 04	For electrical cables	ASINTOTO REFLEX S SOTTILE SOTTILE SISTEMA taO	Matt White	1X0000300.04.00
			Matt Black	1X0000400.04.00
Recessed rose without driver 05	For electrical cables	CARTESIO LOUIS XIV SOTTOSOPRA	Matt White	1X0000300.05.00
			Matt Black	1X0000400.05.00
Recessed rose without driver 06	For electrical cables	CATHODE MISS OVO OVONELPIATTO	Matt White	1X0000300.06.00
			Matt Black	1X0000400.06.00
Recessed rose without driver*		CATHODE MISS OVO OVONELPIATTO	Matt White	1X0230300.04.00
			Matt Black	1X0230400.04.00
Recessed rose without driver*		SIMBIOSI	Matt White	1X0220300.03.00
			Matt Black	1X0220400.03.00

